

Supplementary Materials

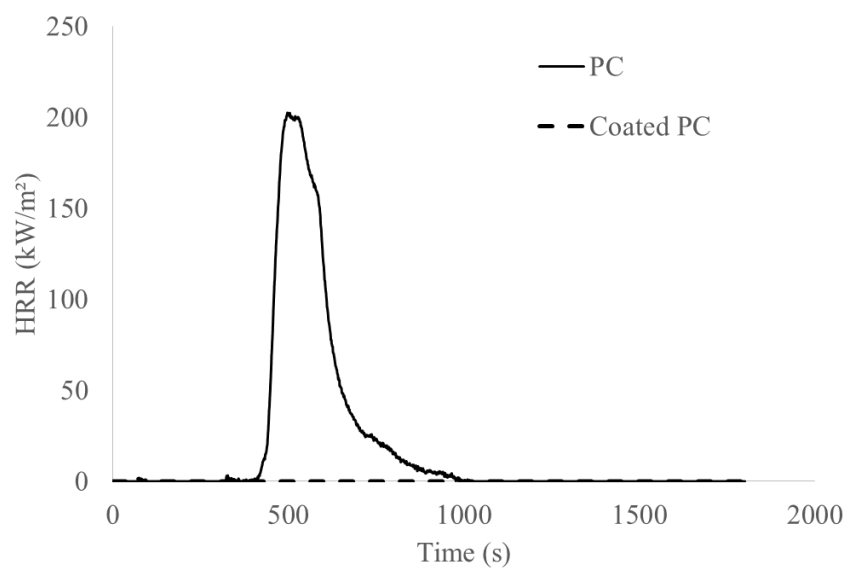


Figure S1. HRR curves obtained with PC and coated PC with the self-stratified epoxy/silicone compositions containing RDP and BDP FR additives at 2.5 wt.% and 5 wt.% (the four curves overlapped).