

Electronic Supplementary Information

Effect of Ag/rGO on the Optical Properties of Plasmon-Modified SnO₂ Composite and Its Application in Self-Powered UV Photodetector

James Taban Abdalla ^{1,2,*}, Jinzhong Wang ^{1,*} and Dongbo Wang ¹

¹ Department of Optoelectronic Information Science, School of Materials Science and Engineering, Harbin Institute of Technology, Harbin 150001, China; wangdongbo@hit.edu.cn (D.W.)

² School of Applied and Industrial Science, University of Juba, P. O. Box 80, Buluk, Juba City, South Sudan

* Correspondence: nyam_bei@hotmail.com (J.T.A.), (jinzhong_wang@hit.edu.cn (J.W.))

Received: 28 October 2019; Accepted: 30 November 2019; Published: date

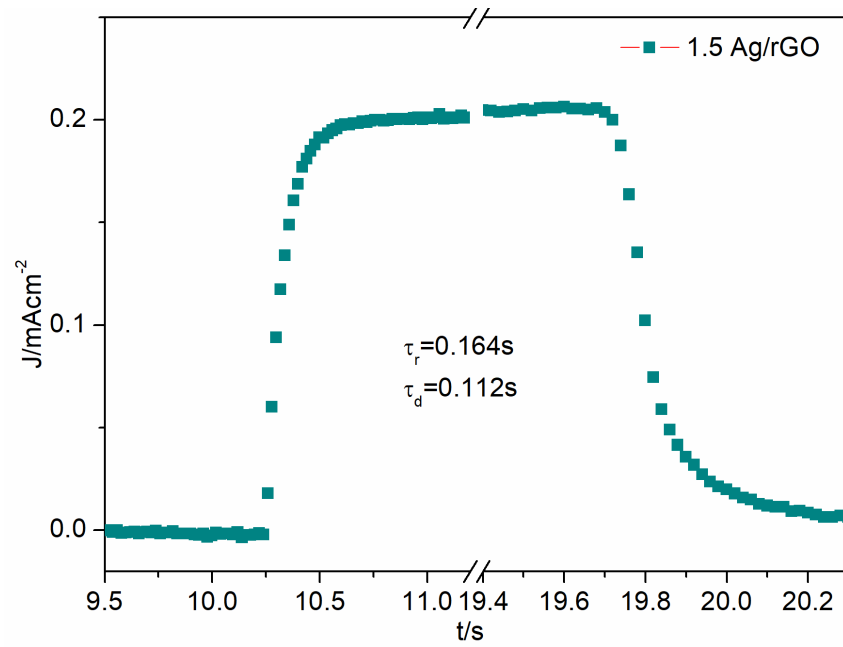


Figure 1. The enlarged rising and decaying edges of the photocurrent response for UVPDs based on SnO_2 incorporated with 1.5 wt. % Ag/rGO hybrid composite.